





mTV Series

Specification	Model	mTV-100
Display	Display	Display to HDTV
	Resolution	HDTV supported
	Brightness (cd/m ²)	HDTV supported
	Contrast Ratio	HDTV supported
	Backlight Type	HDTV supported
	Backlight Life Time	HDTV supported
	Colors	HDTV supported
Memory	Flash	256 MB
	RAM	256 MB
Processor		32 bits RISC Cortex-A8 600MHz
I/O Port	SD Card Slot	SD/SDHC
	USB Host	USB 2.0 x 1
	Ethernet	10/100/1000 Base-T x 1
	COM Port	COM1: RS-232 COM2: RS-485 2W/4W COM3: RS-485 2W
	HDMI	Resolution 1280 x 720
	Audio Output	HDMI Audio Output
RTC		Built-in
Power	Input Power	24±20%VDC
	Power Isolation	Built-in
	Power Consumption	230mA@24VDC
	Voltage Resistance	500VAC (1 min.)
	Isolation Resistance	Exceed 50MΩ at 500VDC
	Vibration Endurance	10 to 25Hz (X, Y, Z direction 2G 30 minutes)
Specification	PCB Coating	Yes
	Enclosure	Plastic
	Dimensions WxHxD	130 x 115 x 27 mm
	Weight	Approx. 0.18 kg
	Mount	35mm DIN rail mounting
Environment	Protection Structure	IP20
	Storage Temperature	-20° - 70°C (-4° - 158°F)
	Operating Temperature	-20° - 55°C (-4° - 131°F)
	Relative Humidity	10% - 90% (non-condensing)
Certificate	CE	CE marked
	UL	cULus Listed
Software		EasyBuilder Pro

Dimensions

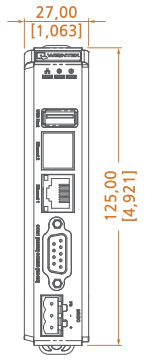


Front View



Top View



Bottom View

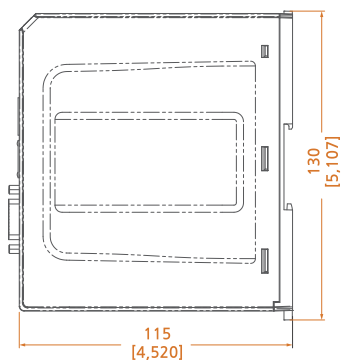

Side View

* 본 사양은 제조사의 사정에 따라 변경될 수 있습니다.